




# FOOT SCALDER

BFE Services Foot Scalders are an auger design, transporting the feet through temperature controlled water

- Installed under the foot unloader, or in a separate room
- Enclosed canopy to minimise heat loss and safety
- Unit is suitable for heating by low pressure steam or hot water
- Fully insulated body
- Blower supplied for air agitation
- Auto water level supply
- Remote placed control box to control the temperature to within 0.5°C
- Stainless steel construction incorporating food approved plastics



# Technical Specifications

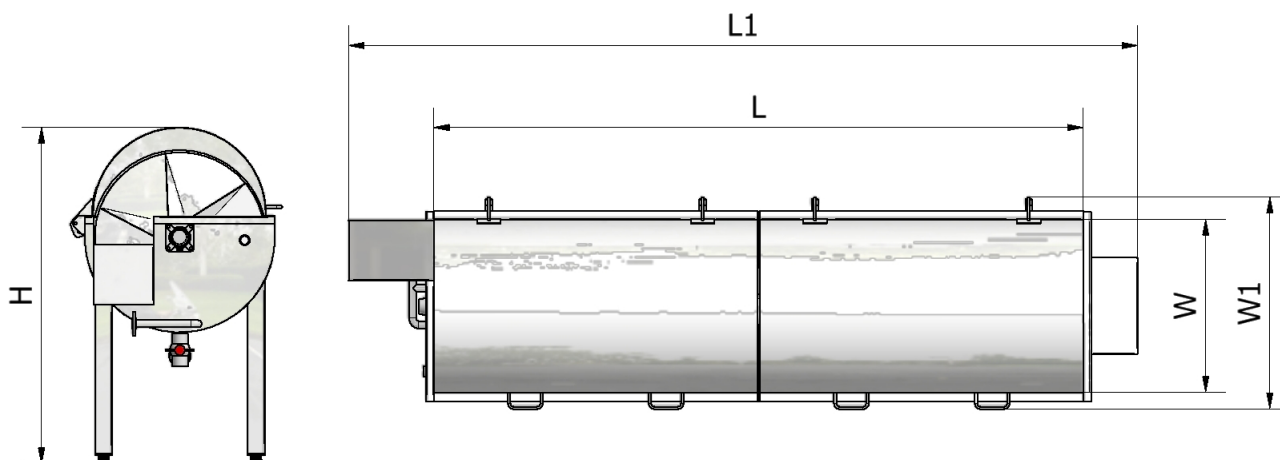

Model		0.8 x 3m	1.2 x 3m
Capacity	kg	1200	1800
Hock Weight	gr	50 - 90	50 - 90
Birds per hour	Bph	8000	12000
Shackle Pitch	inch	6" & 8"	6" & 8"
Length (L)	mm	3000	3000
Length (L1)	mm	4385	4385
Width (W)	mm	800	1200
Width (W1)	mm	900	1300
Height (H)	mm	2000	2000
Water Connections	BSP	1 1/4"	1 1/4"
Heat Exchanger Connection	BSP	1 1/4"	1 1/4"
Drain Connection	BSP	2"	2"
Power 3 Phase	kw	0.55	0.55

All specifications are subject to future modifications

BFE SERVICES PTY. LTD.  
POULTRY PROCESSING EQUIPMENT

6 Dunheved Circuit St Marys NSW 2760 Sydney, Australia

Phone: + 61 2 9623 6900  
Email: [sales@bfeservices.com.au](mailto:sales@bfeservices.com.au)

Fax: + 61 2 9623 8400  
[www.bfeservices.com.au](http://www.bfeservices.com.au)